

Baler Klanke, type KBST 80, 80 t press force, yoc 2008, drive power 2 x 30 kW, with 4-fold horizontal binding, with defective chain belt conveyor



The machine worked without any problems until the conveyor belt broke down. It was then decided not to have the conveyor belt repaired but to sell the entire pressing system. The last maintenance was carried out on 29/06/22.

Technical data baler:

Manufacturer Klanke
Type KBST 80
Year of construction 10/2008
Pressing force main press 80 tonnes
Theoretical throughput 225 m³/hour
Bale dimensions 1,050 x 760 mm, variable length
Drive power 2 x 30 kW
Connected load, total 75.5 kW
Tying 4-fold horizontal, fully automatic
Bale weights with a bale length of approx. 1.2 m approx. 400 up to 500 kg, depending on material
Hydraulic oil tank capacity 1000 litres, oil type HLP 46
PLC control Siemens Simatic S7-200
Control panel Siemens Simatic Touch
Space required baler, set up with hopper and conveyor belt 8,585 x 17,450 x 4,395 (l x w x h)
Effective transport dimensions excluding press 8,585 x 2,210 x 2,800 mm (l x w x h)
Transport weight press 17 tonnes

Condition of the baler:

The machine worked without any problems until the conveyor belt broke down. It was then decided not to have the conveyor belt repaired but to sell the entire pressing system. The last maintenance was carried out on 29/06/22.

Technical data conveyor:

Manufacturer APULLMA Maschinenfabrik, Germany
Type chain belt conveyor
Year of construction 2008

Baler Klanke, type KBST 80, 80 t press force, yoc 2008, drive power 2 x 30 kW, with 4-fold horizontal binding, with defective chain belt conveyor

Length of infeed belt 5,975 mm

Length of ascending belt approx. 8,500 mm

Length of gooseneck 2,000 mm

Useful width 1,600 mm

Pit dimensions to the conveyor belt 10,300 x 2,500 x 1,200 mm

Condition of the conveyor:

The chain of the conveyor belt is torn, some crossbars are bent and the rubber covering is also torn. The conveyor belt must be repaired and overhauled.

Scope of delivery:

1 piece APULLMA chain belt conveyor, defective

1 piece Klanke KBST 80 press

8 pcs. wire roll hater with wire

1 bale chute

Comments:

The documentation (Manual, electr./hydr.-drawings), are completely available. Inspections are possible after agreement. We will not assume liability for the given technical data and possible errors.

Baler Klanke, type KBST 80, 80 t press force, yoc 2008, drive power 2 x 30 kW, with 4-fold horizontal binding, with defective chain belt conveyor




Baler Klanke, type KBST 80, 80 t press force, yoc 2008, drive power 2 x 30 kW, with 4-fold horizontal binding, with defective chain belt conveyoyr



Baler Klanke, type KBST 80, 80 t press force, yoc 2008, drive power 2 x 30 kW, with 4-fold horizontal binding, with defective chain belt conveyor



Baler Klanke, type KBST 80, 80 t press force, yoc 2008, drive power 2 x 30 kW, with 4-fold horizontal binding, with defective chain belt conveyoyr

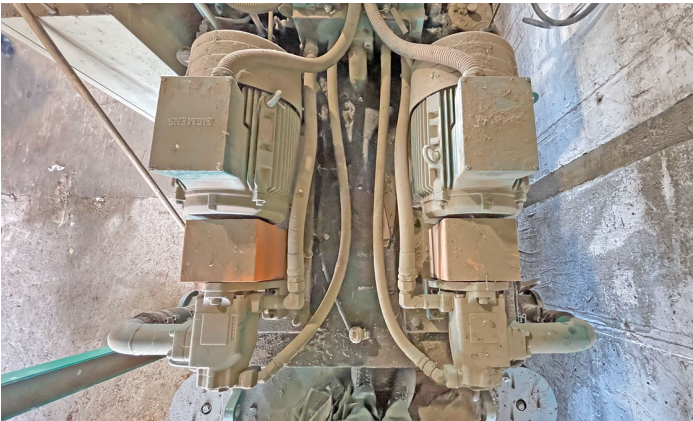

Baler Klanke, type KBST 80, 80 t press force, yoc 2008, drive power 2 x 30 kW, with 4-fold horizontal binding, with defective chain belt conveyor



Baler Klanke, type KBST 80, 80 t press force, yoc 2008, drive power 2 x 30 kW, with 4-fold horizontal binding, with defective chain belt conveyor

